


Wiring Diagram

Connect CyberSwitching CSE stations to any one of the power sources as shown:

1. 208 VAC three phase, Delta system, Center tap grounded (use only two phases)
2. 208 VAC three phase, Wye system (use only two phases)
3. 240VAC single phase

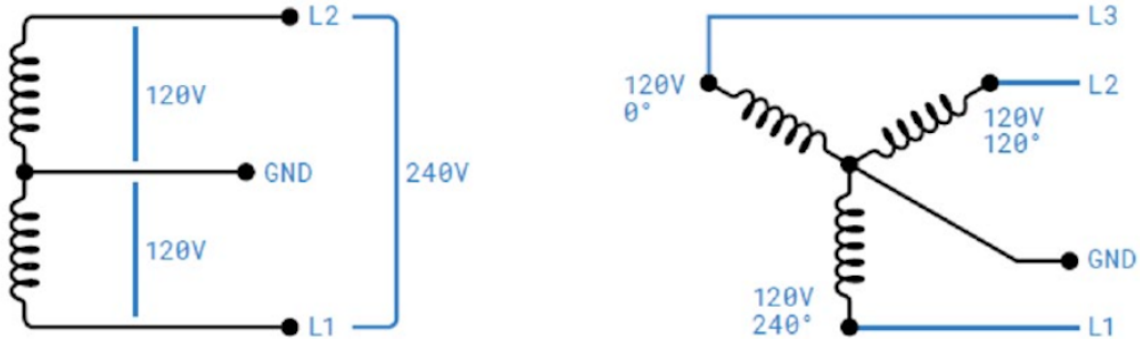

In a delta system, connect the CSE station only to a center-tapped grounded transformer only as shown below. Connect the station to the side where ground is bonded (in figure C line A and C). This allows voltages to remain constant regardless of other loads that may be using the lines. Please do not connect to other type of power sources shown below.

