

# E SERIES

by CYBER SWITCHING®




## Metered Power Distribution

The E Series line of PDU's take standard unmanaged plug strips to a new level. It's not just a plug strip... It's a tool!


### Features:

- Available in 15A, 20A and 30A models
- 3 digit display
- Display flashes when:
  - Current exceeds 80% of rating and/or
  - High or low voltage condition exists
- True RMS current and voltage measurement
- Single fixed input cord
- Horizontal and vertical (Zero RU) format

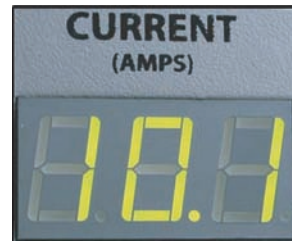

### Specifications:

- Operating Temperature: 0-45°C
- Current Accuracy: +/-5% from 20% to 80% of rating at 25°C
- Voltage Accuracy: +/-2% of nominal setting at 25°C
- Nominal input voltage set at factory

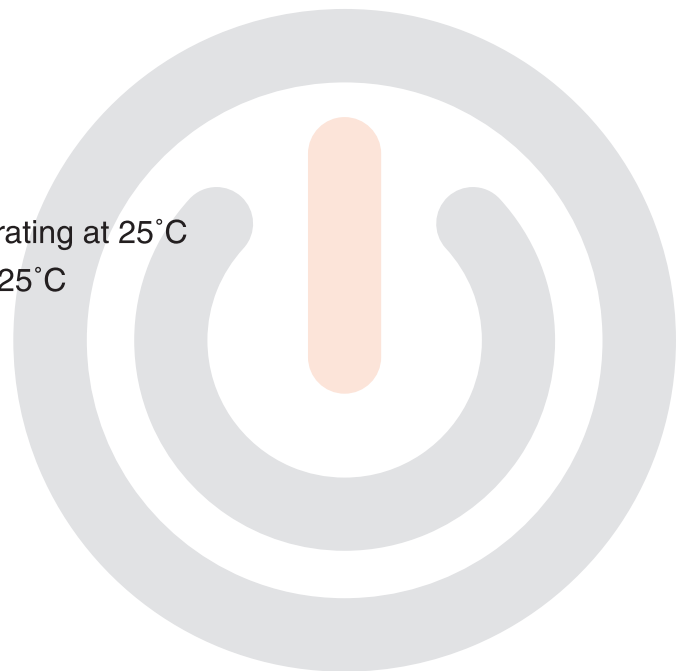

## E Series Technical Specifications

<b>Model</b>	<b>Part Number</b>	<b>Input Voltage</b>	<b>Current per Input Cord**</b>	<b>Input Connection*</b>	<b>Current per Outlet Receptacle **</b>	<b>Outlet Type</b>	<b>Dimensions</b>
<b>E 1020</b>	1000515	120 VAC	20 A	(1) NEMA 5-20P	20 A	(10) NEMA 5-20R	17W x 6D x 1.75H
<b>E 1020 w/ ATX</b>	1011258	120 VAC	20 A	(1) NEMA 5-20P	20 A	(10) NEMA 5-20R	17W x 6D x 1.75H
<b>E 1030iCB</b>	1000474	120-240 VAC	30 A	(1) NEMA L5-30P	15 A	(10) IEC 60320/C13	17W x 6D x 1.75H
<b>E 1620</b>	1000591	120 VAC	20 A	(1) NEMA 5-20P	20 A	(16) NEMA 5-20R	17W x 6D x 1.75H
<b>E 2020V</b>	1000560	120 VAC	20 A	(1) NEMA 5-20P	20 A	(20) NEMA 5-20R	2W x 2D x 65H
<b>E 2030VLCB</b>	1010331	120 VAC	30 A	(1) NEMA L5-30P	20 A	(20) NEMA 5-20R	2W x 2D x 65H
<b>E 2130VLiCB</b>	1010105	100-240 VAC	30 A	(1) NEMA L6-30P	15 A	(21) IEC 60320/C13	2W x 2D x 59H
<b>E2 2030VLCB w/ invertible readout</b>	1011553	120 VAC	30 A	(1) NEMA L5-30P	20 A	(20) NEMA 5-20R	2W x 2.75D x 65H
<b>Efx</b>	1011543	120-240 VAC	30 A	(1) NEMA L6-30P	15 A	(18) IEC 60320/C13	17W x 6D x 1.75H

ATX - Indicates Automatic Transfer Switch  
 i - Indicates international unit  
 L - Indicates locking plug and/or receptacles  
 V - Indicates vertical format  
 CB - Indicates circuit breaker

\* Various input cord cap options available

\*\* Safety Agency derating in U.S. for continuous current is 80% of rating shown

All models can be customized for different configurations.  
 Input cords sold separately. Various lengths available