

THE MOST RELIABLE



COMMERCIAL EV CHARGER

- ✓ The highest uptime in America
- ✓ The quickest EV Charger to activate
- ✓ The most cost-efficient commercial EV Charging station

www.cyberswitching.com



4G, WIFI, Ethernet



208-240VAC



NEMA 3R rated



-22°F to 122°F



16A - 48A



Fits every EV



Wall mount



Single & Dual Pedestal



Cable Management



UL, EnergyStar



Assembled in USA








85+ rebate programs


www.cyberswitching.com



What can you do with CSE1 EV Charger?

-  Collect revenue (Credit Card, Apple Pay, Google Pay)
-  Reserve the chargers in advance
-  Flat or Tiered Pricing (by Energy or by Time)
-  Utility Demand Response
-  Advanced Load Management
-  Add new or existing RFID cards
-  Session limits & Idle fees
-  Analytics & Reporting



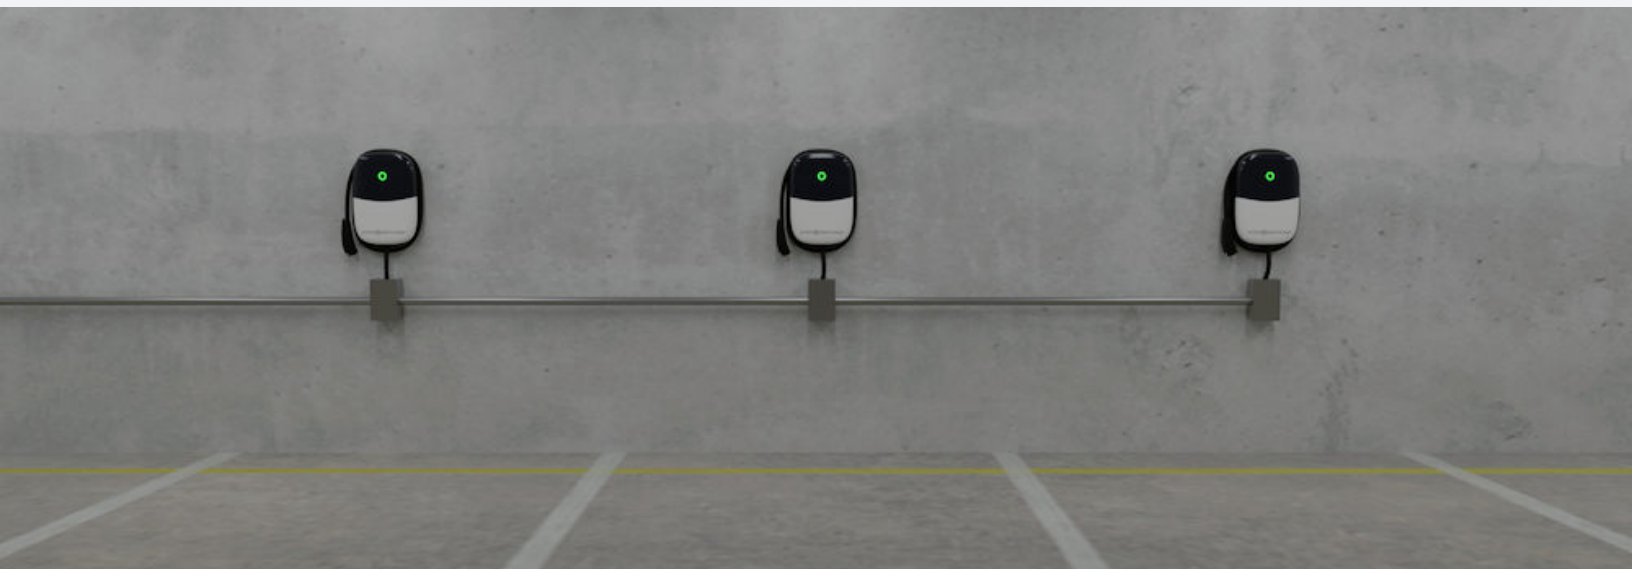

| | |
|---------------------|---|
| Voltage | 208-240 VAC |
| Power/Amperage | 3.5kW/16A, 7kW/32A, 10kW/40A, 11.5kW/48A |
| Frequency | 50-60 Hz |
| User Authentication | RFID |
| Network | LAN, WiFi, 4G |
| Connectivity | OCPP 1.6J |
| Cable Length | 18 ft |
| FCC | Compliant |

| | |
|-----------------------|--|
| Certificates | ETL, Energy Star |
| Charging Interface | SAE J1772, Type 1 |
| Safety Compliance | UL2594, UL2231-1-2, UL2251, UL1998, UL62, UL991, UL840, NFPA70 |
| RCD | CCID20 |
| Multiple Protection | UVP, OVP, RCD, SPD, OCP, OTP, CPFP, Ground Fault Protection |
| Operating Temperature | -22°F to 122°F |
| Indoor/Outdoor | IK08, Type 3 Enclosure |
| Altitude | ≤ 6561ft |

2-year complimentary warranty. An option to extend it up to 3 more years.





**THANK YOU, AND WE
LOOK FORWARD TO
WORKING WITH YOU!**

www.cyberswitching.com

